


*Liebert® CRV™ Row-Based Cooling*  
*Intelligent Precision Cooling For Data Center Equipment*

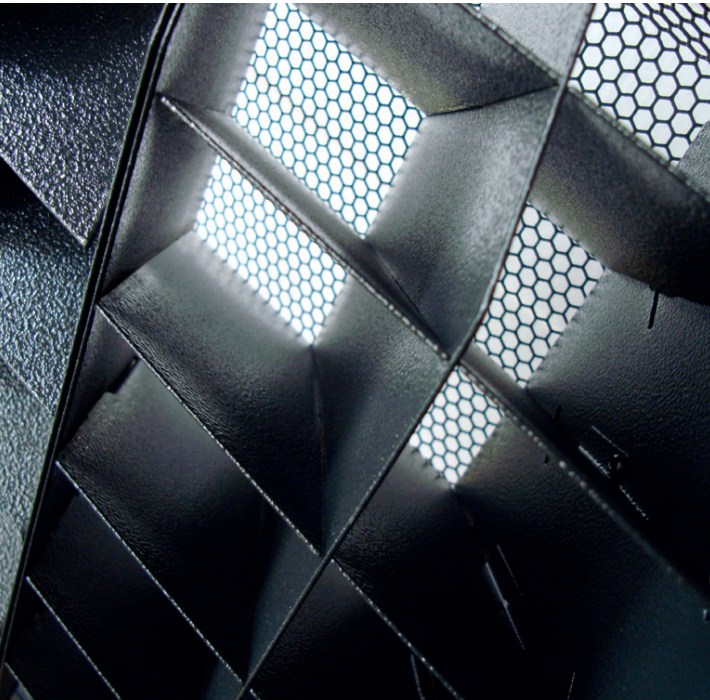

# The Intelligent Data Center Cooling Solution: Liebert® CRV™

## Trust the industry leader in Precision Cooling to deliver the right solution for your data center:

In 2002, Emerson Network Power's Liebert XD™ family was the industry's first row-based cooling system. Now, we have taken more than 40 years of engineering experience and the most advanced technologies to design the Liebert CRV row-based precision cooling system.

For maximum application flexibility, Liebert CRV is available in multiple capacities and configurations:

- **600mm wide:** 20kW or 35kW air or water/glycol-based, or 40kW chilled water-based cooling units
- **300mm wide:** 19.6kW air cooled, or 30kW chilled water-based cooling units

### Always informed:

The Liebert iCOM™ display shows the inlet temperature of the protected racks, tracks other critical information that keeps IT personnel up to date on system operation, and allows the Liebert CRV to optimize cooling for the rack-based equipment.

### Easy to deploy and maintain:

Row-based placement puts cooling at the heat source, with adjustable baffles on the CR019, CR020, CR035, and CR040 models that ensure cool air reaches the servers, while logical placement of reliable components results in ease of service.

### Intelligently efficient:

Variable speed fans, variable capacity digital scroll compressor on compressorized models and the advanced Liebert iCOM control system all work together to provide energy savings over traditional perimeter cooling systems.



**600mm (24")  
cabinet: 20 or 35kW  
air or water/glycol  
cooled; 40kW chilled  
water cooled.**

**300mm (12")  
cabinet: 19.6kW  
air cooled**

**300mm (12")  
cabinet: 30kW  
chilled water  
cooled.**


# Put Precision Cooling In The Row To Reduce Energy Consumption and Optimize Operating Conditions For IT Equipment

The Liebert® CRV™ is a precision cooling system that installs within a row of data center racks—close to the server heat source—for the most efficient cooling of critical IT equipment.

The rack-sized Liebert CRV provides high capacity cooling in a small footprint and features the Liebert iCOM™ Control System that modulates unit performance in real-time, based on conditions in the row. Monitoring up to 10 racks with 20 sensors, the Liebert CRV precisely controls air temperature, humidity and filtration in the surrounding racks.



**Liebert IntelliSlot™ Communication Cards** can be accessed without entering the high voltage panel and allow the system to communicate with remote infrastructure management systems.



**R-410A Refrigerant** is environmentally friendly and meets the latest government standards.

**Liebert iCOM® Control** presents up to 11 temperature measurements and unit performance in an easy to understand graphical summary.

**Rack Sensors** provide two temperature readings per rack to ensure the proper amount of cold air is provided to eliminate hot spots.

**Adjustable Baffles** on the 24 in. (600mm) wide model direct airflow right, left or both directions, and left and right on the CR019 model, allowing you to easily change the airflow distribution as your cooling needs change.

**Slanted, Blue Hydrophilic Cooling Coil** with intermediate drain pans, quickly disbursts condensation, thus preventing carryover of water into the cold aisle.

**Variable EC Fans** regulate airflow and reduce the fan input power; resulting in up to 50% less power used by the fans compared to traditional perimeter cooling.

**High Performance Air Filters** are easily accessed through the back of the unit.



**Digital Scroll Compressor** on compressorized models enables the variable cooling capacity to precisely match changing cooling demand without cycling on and off, reducing energy consumption and extending compressor life.

# Liebert® iCOM™ Controls: Optimized Performance, Reliability, and Efficiency



The Liebert iCOM control system provides advanced control and monitoring capabilities to Liebert CRV™ units, allowing up to 32 cooling units to work together as a single system to optimize room performance and improve energy efficiency. Liebert iCOM controls offer a variety of advantages, including icon-based navigation, adjustable control algorithms, and data center monitoring capabilities.

## Control

- **Advanced control algorithms** allow the airflow and cooling to be modulated independently, eliminating excessive operations.
- **Temperature sensors** attached to server racks allow the optimal amount of air and cooling to be provided without any increased risk for hot spots.
- **Multiple Liebert CRV units communicate with each other** to optimize system performance while reducing noise and airflow, to provide a work-friendly environment.
- **Six control modes of operation** allow the Liebert CRV to be customized for any application.

## Monitoring

- **Six selectable status screens** allow you to customize how system information is presented.
- **Up to 20 rack temperatures may be summarized** using bar graphs or a drawing of the data center on the local display, or all data may be reported remotely, providing users with a built-in mini-monitoring system.
- **All unit information may be reported remotely** through a variety of protocols, including HTTP, SNMP, RS-485 Modbus, BACnet IP and Liebert SiteScan Web 4.0 Protocol.


## Predictive Wellness/Maintenance

- **Enhances reliability with predictive analysis** of components and performance – advance notice allows proactive management of system maintenance.
- **Event logs store the last 400 messages** to enrich unit history and enhance support.


## Service and Spare Parts History

- **On-board service history** allows prompt access to records for service personnel.
- **On-board spare parts list** provides convenient identification of the appropriate unit spare parts and part numbers for faster service and support.


The **Large Graphic Display** features a 320x240 dot matrix screen operates with intuitive images rather than pages of text. This display can be used to control a single cooling unit or any cooling unit on a network.

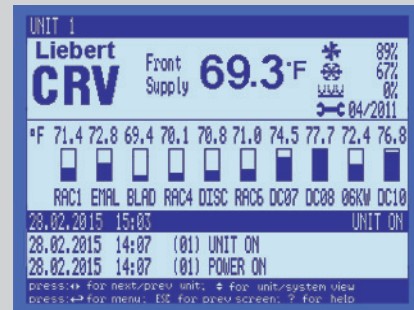

Bar graphs show the inlet temperature of every rack with a 2T temperature sensor.

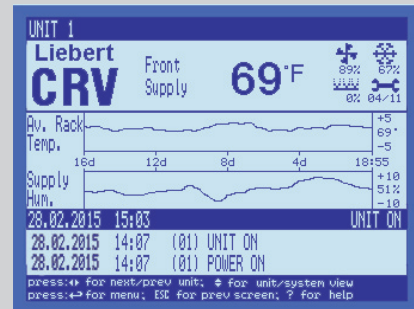

Line graphs show the historical temperature and humidity conditions for the past 8 minutes to 16 days.

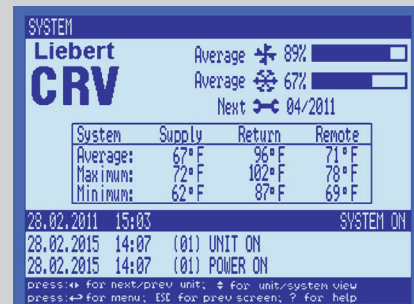


A single view shows the average, minimum, and maximum temperature of every 2T rack sensor in a single- or multi-unit system.

# Designed For Reliability and Energy Efficient Operation

## Reduce operating costs and energy consumption

Through the use of advanced control algorithms, the Liebert® iCOM™ control system is able to leverage the energy efficiency of the EC plug fans and digital scroll compressor to provide greater energy savings at the system level than other row-based units.

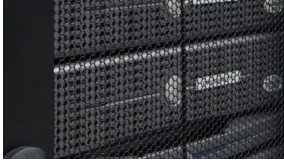

### Rack Sensors

Two temperature sensors are placed at the inlet of up to 10 racks. Liebert CRV™ reads the sensors and adjusts airflow and temperature to ensure the proper operating conditions for the rack equipment.



### Liebert IntelliSlot™ Communication Cards

The Liebert CRV includes two Liebert IntelliSlot card slots for easy plug-in of optional communication cards:

#### Liebert IntelliSlot Unity-DP Card

- Delivers SNMP and HTTP web-management communications capabilities for monitoring and control through your existing network with no additional software required.
- Allows remote monitoring and control of Liebert CRV using RS-485 Modbus through Liebert SiteScan Web or your existing Building Management System. Also enables Modbus IP/BACnet IP for Liebert CRV.
- Supports Emerson Protocol for communicating with Trellis™ and Liebert Nform™ software applications, and LIFE™ Technology for supporting Remote Service Delivery applications.

#### Liebert IntelliSlot SiteLink-E Card


- Liebert SiteScan Web 4.0 Protocol Card for SiteLink-E connectivity from Liebert CRV.



### Digital Scroll Variable Capacity Compressor

The exclusive Digital Scroll Compressor uses the latest control technology to deliver precise operation and significantly higher energy efficiency than other compressor technologies. In addition to the advantage of the dependable scroll design, Digital Scroll technology provides infinitely variable capacity modulation between 20–100% to enable the output to precisely match the changing cooling demands of the room.


- More efficient than traditional hot-gas bypass approach.
- Improved reliability by reducing compressor cycling and component wear.
- Improved performance because the compressor can easily adapt to changing load conditions and provide precise temperature control.
- Superior oil return compared to inverter-driven compressors.
- No harmonic noise issues, unlike inverter-driven compressors.

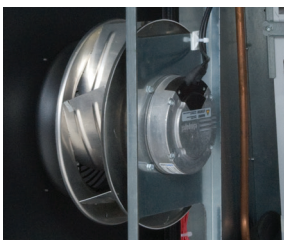

### Variable Speed EC Fans

EC fan technology works to regulate airflow and reduce fan input power. You can have confidence that the EC Fans, managed through Liebert iCOM controls, deliver airflow for the optimal IT equipment operating conditions.

- Speed controllers on each motor eliminates a single point of failure.
- Additional airflow available for emergency conditions and elevation correction.



### Adjustable Baffles

Modular air supply baffles on the CR019, CR020, CR035, and CR040 models direct the cold air to the servers, and may be adjusted anytime cooling needs change. When Liebert CRV is installed at the end of a row, the air is directed down the aisle toward the servers – not lost to the room, reducing the hot aisle temperature.

# Liebert® CRV™: Reliable, Flexible and Economical

All row-based cooling systems are not created equal. Compare Liebert CRV features to other technologies:

## Key Benefits

### Flexibility

- Horizontal airflow cooling design is suitable for non-raised or raised floors.
- Adjustable airflow baffles on CR019, CR020, CR035, and CR040 models maximize cooling to rack equipment, allowing the system to be positioned within the row or at the end of the row.
- Air, water, glycol, and chilled water systems available.
- Caster mounted for easy placement.
- Multiple units communicate with each other to improve system performance and reduce energy consumption.
- Compatible with both Emerson Network Power SmartAisle™ infrastructure, and Aisle Containment system.

### Lowest Total Cost of Ownership

- Designed for higher return air temperature to maximize cooling capacity and increase efficiency.
- Only front and back access required, resulting in minimized installation and service time.
- Digital Scroll compressor and variable speed EC fans operate efficiently to reduce energy consumption and provide longer component life.
- Compact cabinet minimizes floor space requirements.

### High Availability

- Self-adapts to changing conditions to provide 24/7 precision environmental control: cooling, humidity control (on 24 in. (600mm) wide model) and air filtration.
- Liebert iCOM™ control provides alerts for preventive maintenance before issues occur.
- Variable capacity Digital Scroll compressor adapts to load and eliminates compressor cycling, greatly increasing compressor life.
- Built for both ease of installation and speed of maintenance. All components are easily accessible from the front and rear of unit, eliminating side access.
- Special attention has been given to the design to only require front and rear access for servicing all internal components.

### Ideal Applications

- Small to medium-sized data centers
  - From 2 to 24 racks
  - Optimal for cold/hot aisle configurations
- Heat density up to 10 kW/rack without containment.
- Raised and non-raised floors.
- Rooms with a low ceiling where air cannot be ducted.
- SmartAisle™ containment system.
- Spot cooling in large data centers.

Product feature	24 in. (600mm) Wide Model	12 in. (300mm) Wide Air Cooled Model	12 in. (300mm) Wide Chilled Water Model
Liebert iCOM control	+	+	+
Digital Scroll Compressor	+	+	
Variable speed EC fans	+	+	+
Adjustable Air Supply Baffles	+	+	
Install at the end of the row or within the row	+	+	Containment required at the end of row for proper airflow management
2T Rack temperature sensors and humidity measurement	+	+	+
Front and rear access only	+	+	+
Low audible noise	+	+	
Hydrophilic coated coil resists water carryover	+	+	+
Reheat and humidifier	+		
Partial fan redundancy	+	+	
Superior Service Access Panel	+		
Separate component and airstream sections	+		
Liebert Intellislot card housings	+	+	+
Condensate pump	+	+	+
Collect 20 temperatures on 10 IT racks	+	+	+

# The Right Cooling Choice for a Range of Data Center Applications




## Liebert® CRV™ installs at the ends or within the row of racks on non-raised or raised floor applications.

- Ideal for hot/cold aisle configurations.
- Rows should have no missing racks and minimal cold aisle obstructions.
- Ensure obstruction exists (rack, wall, etc.) directly across from cooling unit.
- Optimal performance when used with an Emerson Network Power SmartAisle cold-aisle containment system.


## Liebert CRV is available in Direct Expansion or Chilled Water Models

- Direct Expansion Models are air cooled, water cooled or glycol cooled.
- Chilled Water Models require connection to a chilled water source.


### Typical Configurations

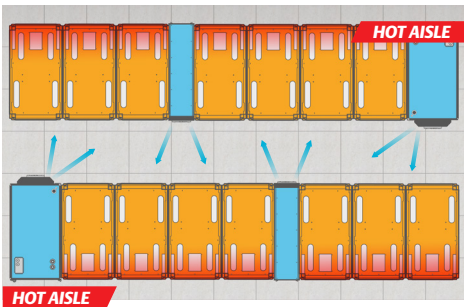


By placing Liebert CRV 600mm units at either end of the rows and inserting 300mm wide units throughout, the Liebert iCOM controls ensure that the aisle is evenly pressurized, simulating cold aisle containment.

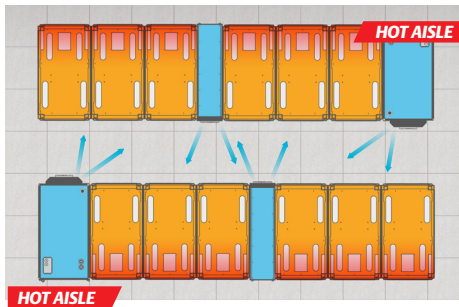


All Liebert CRV units communicate with each other via unit-to-unit networking to ensure even air distribution and optimized system efficiency.

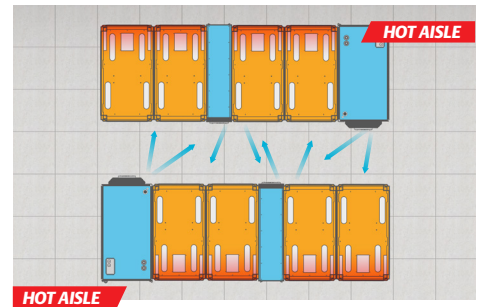


As rack densities increase, inserting additional cooling units within the row will meet cooling demand.

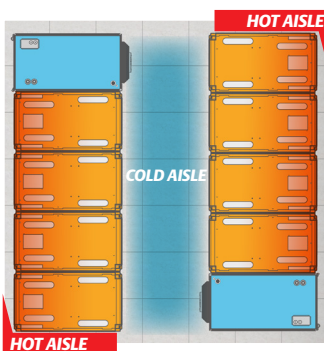

For data centers where heat density needs to be increased without installing a raised floor or a higher roof, the Liebert CRV and Emerson Network Power SmartAisle™ cold aisle containment is the ideal solution.

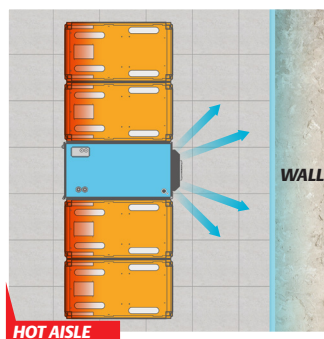

The Liebert CRV adapts to obstructions, such as walls, pillars, and open racks doors.

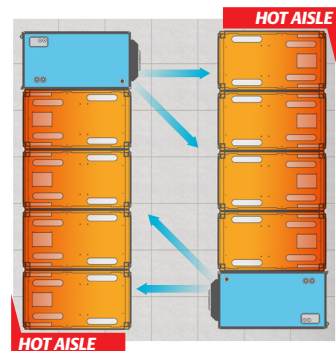

Liebert CRV systems operating in hot aisle/cold aisle configuration.

## Technical Data – Liebert® CRV™

DX			
Nominal Capacity	19.6kW	20kW	35kW
	Air-cooled	Air-cooled	Air-cooled
	–	Water/Glycol cooled	Water/Glycol cooled
Input Voltage	208-230V, 3ph, 60Hz	208, 3ph, 60Hz	208, 3ph, 60Hz
	–	460V, 3ph, 60z	460V, 3ph, 60z
	400V, 3ph, 50Hz	400V, 3ph, 50Hz	400V, 3ph, 50Hz
Refrigerant	R410A		
Compressor	Digital Scroll, variable capacity 20-100%		
Fans	Variable speed fans		
Options	Condensate Pump	Condensate Pump	Condensate Pump
	–	Electric reheat	Electric reheat
	–	Humidification	Humidification
Dimensions			
Height	79in (2000mm)	79in (2000mm)	79in (2000mm)
Width	12in (300mm)	24in (600mm)	24in (600mm)
Depth	43in (1100mm)	43in (1100mm)	43in (1100mm)
Weight			
Air-cooled	230lbs (507kg)	744lbs (337kg)	811lbs (368kg)
Water/Glycol	–	778lbs (353kg)	856lbs (388kg)

CW			
Nominal Capacity	30kW	34kW	40kW
Input Voltage	208-230V, 1ph, 50-60Hz	208-230V, 1ph, 50-60Hz	208, 3ph, 60Hz
	–	–	460V, 3ph, 60z
	–	–	400V, 3ph, 50Hz
Fans	Variable speed fans		
Options	Condensate Pump	Condensate Pump	Condensate Pump
	–	–	Electric reheat
	–	–	Humidification
Dimensions			
Height	79in (2000mm)	87in (2200mm)	79in (2000mm)
Width	12in (300mm)	12in (300mm)	24in (600mm)
Depth	43in (1100mm)	43in (1100mm)	43in (1100mm)
Weight	365 lb (166 kg)	405 lb (184 kg)	733lbs (332kg)

### Controls and Communications – All Units

Controls	Liebert® iCOM™ control with large graphical display and 20 sensors for up to 10 racks
Communications	
Liebert IntelliSlot™ Unity-DP Card	HTTP and SNMP, RS-485 Modbus, Modbus IP/BACnet IP
Liebert IntelliSlot SiteLink-E Card	Liebert SiteScan® Web 4.0 Protocol Card

**Emerson Network Power**  
**Global Headquarters**  
 1050 Dearborn Drive  
 P.O. Box 29186  
 Columbus, Ohio 43229  
 800 877 9222 Phone (U.S. & Canada Only)  
 614 888 0246 Phone (Outside U.S.)  
 Contact@EmersonNetworkPower.com

**Emerson Network Power**  
**Caribbean and Latin America**  
 Office – United States of America  
 +1-954-984-3452 Phone  
 Ask.Cala@Emerson.com

**Emerson Network Power**  
**Canada**  
 3580 Laird Rd Unit 1  
 Mississauga  
 Ontario L5L 5Z7  
 +1 905 569 8282  
 Ask@EmersonNetworkPower.com

**liebert.com**  
**24 x 7 Tech Support**  
 800 222 5877 Phone  
 614 841 6755 (outside U.S.)

**EmersonNetworkPower.com**

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2014 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice. All names and logos referred to herein are trade names, trademarks or registered trademarks of their respective owners. ® Liebert is a registered trademark of the Liebert Corporation. Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2014 Emerson Electric Co.

SL-11972 (R 02/14) Printed in USA